


## EDELSTAHL PNEUMATIK ZYLINDERROHRE

NENNWEITE (MM)	D	X	S	KG/M	IHRE BEMERKUNGEN
8	9,27	x	0,635	0,136	
10	11,27	x	0,635	0,168	
12	13,27	x	0,635	0,199	
16	17,27	x	0,635	0,263	
20	21,27	x	0,635	0,326	
25	26,52	x	0,760	0,487	
32	33,60	x	0,800	0,652	
32	36,00	x	2,000	1,690	
40	41,60	x	0,800	0,811	
40	44,00	x	2,000	2,087	
40	45,00	x	2,500	2,640	
50	52,40	x	1,200	1,527	
50	54,00	x	2,000	2,584	
50	55,00	x	2,500	3,262	
63	65,40	x	1,200	1,914	
63	67,00	x	2,000	3,231	
63	68,00	x	2,500	4,069	
80	86,00	x	3,000	6,188	
100	106,00	x	3,000	7,679	
125	131,00	x	3,000	9,615	

### SPEZIFIKATION

Ausführung	Edelstahl Pneumatik Zylinderrohr längsnahtgeschweißt, kalt nachgezogen
Legierung	304/304L
Innendurch- messertoleranz	ISO H11
Rauhtiefe	Ra <= 0,5 µm
Außenoberfläche	mill finished / geschliffen
Qualität	100% "Eddy-Current" getestet

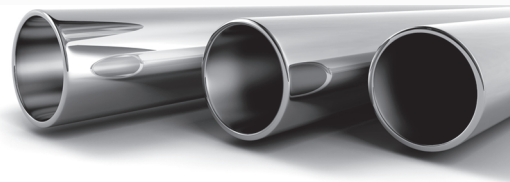

### KONTAKT

adexco GmbH

Kammerratsheide 66  
33609 Bielefeld  
Germany

Fon: +49 521 9889 727-0  
Fax: +49 521 9889 727-99

E-Mail: [info@adexco.de](mailto:info@adexco.de)  
Web: [www.adexco.de](http://www.adexco.de)